

Smart EV Charger

Charge with ease, drive at peace



Max 3-hour full charge
for 60 kWh battery



22 kW fast charge
at around 145 km per hour



DS-TMP102-A1
(22kW)(EU)



Electric protection
with Dynamic Load Balance



Secure and reliable
power supply



Simple and user-friendly
interface



www.hikvision.com
support@hikvision.com



Suitable for electric vehicle models with
European-standard

Product Highlights



Easy Operation

Plug-and-play, RFID charging, scheduled charging



Secure Design

Metal housing, emergency stop, built-in RCD



User-friendly Interface

Six-color lights and 7-inch LCD for charging info display



All-around Protection

Electrical (surge, over-current, leakage) and lightning safeguards

Parking Space Management


Link charger with on-street ANPR poles for EV space control



EV Charger



On-Street ANPR Pole

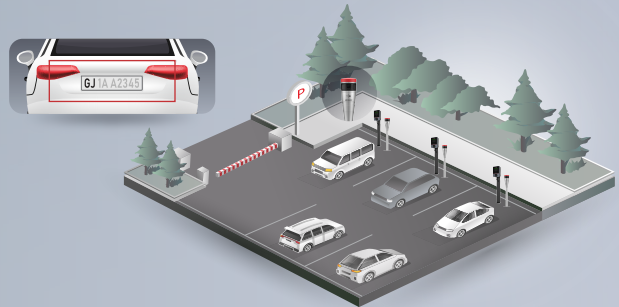

Product Specifications

Input Voltage Range: 400 VAC $\pm$ 15%

Input Cable: 3P + N + PE (L1, L2, L3, N, PE)

Output Voltage Range: 400 VAC $\pm$ 15%

Rated Output Power: 22 kW

Standby Power Consumption: 7W

Number of Output Chargers: 1



DS-TMP102-A1(22kW)(EU)

Communication Interfaces:

4G, Wi-Fi, 10/100M network interface

Charging Interface: IEC62196-Type2

Charging Protocol:

IEC 61851-1 communication protocol


Installation Mode:

Wall-mount and floor-standing

Modular Design:

Control unit, charger line unit, metering unit, status indicator unit, display unit, card reading unit, protection modules, etc.

Product Accessories

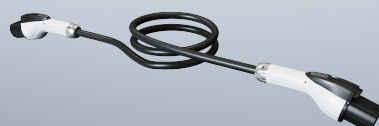

Charging Cable Type 2 to Type 2

DS-TMP00C-A22(5m)

Floor Standing Pole

DS-TMP00A-A22W(EU)

